


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

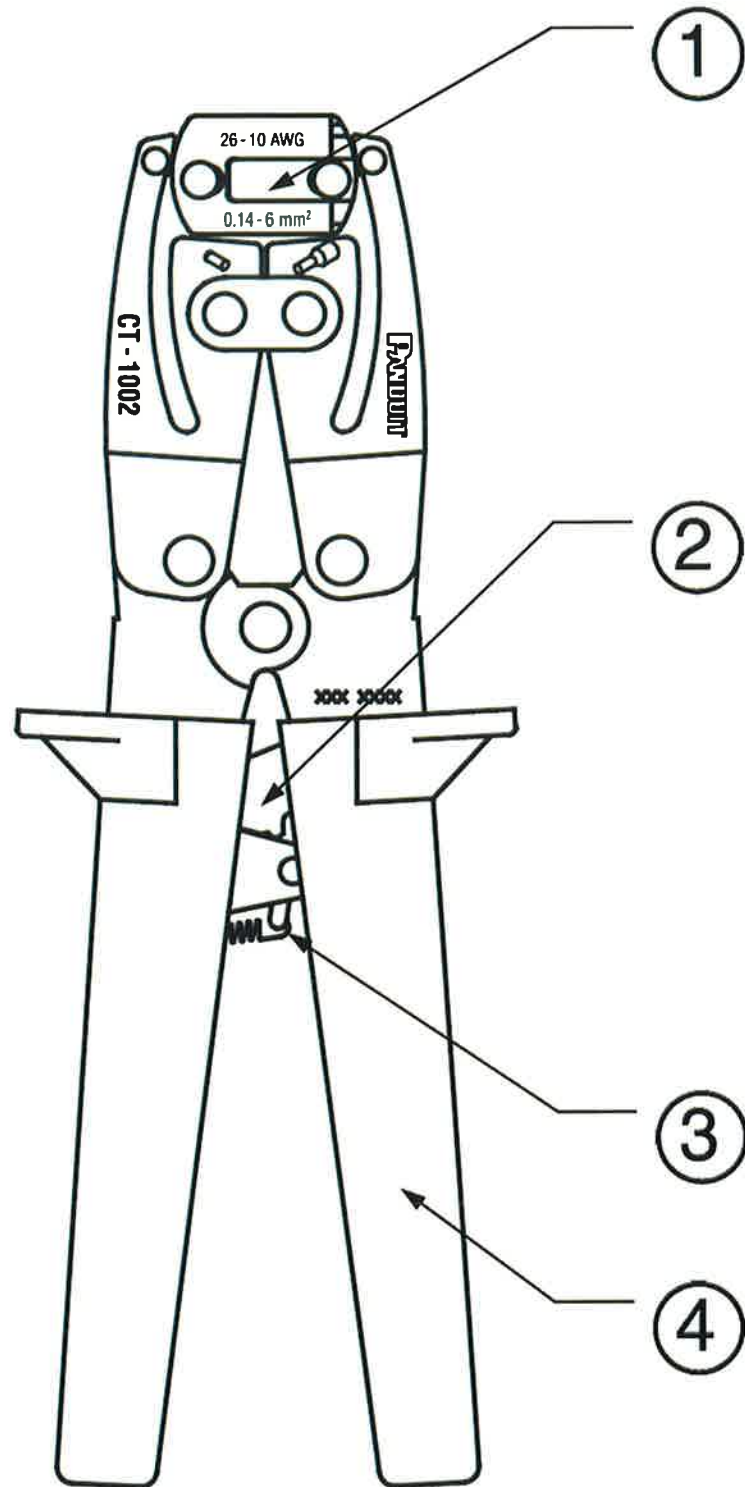

CT-1002 TOOL SHOWN

TOOL	LENGTH	CLOSED HANDLE WIDTH
CT-1002	8.27 (210.0)	2.17 (55.1)
Crimps PANDUIT #26 – 10 AWG single wire insulated ferrules (DIN). #26 – 10 AWG single wire insulated ferrules (French). #22 – 12 AWG insulated dual-wire (DIN) ferrules. #24 – 10 AWG non-insulated ferrules.		
CT-1003	8.27 (210.0)	2.17 (55.1)
Crimps PANDUIT #22 – 8 AWG single wire insulated ferrules (DIN). #22 – 8 AWG single wire insulated ferrules (French). #22 – 10 AWG insulated dual-wire (DIN) ferrules. #22 – 10 AWG non-insulated ferrules.		
CT-1004	8.27 (210.0)	2.17 (55.1)
Crimps PANDUIT #8 – 6 AWG single wire insulated ferrules (DIN). #8 – 6 AWG single wire insulated ferrules (French). #10 AWG insulated dual-wire (DIN) ferrule. #8 – #6 AWG non-insulated ferrules.		

NOTES, UNLESS OTHERWISE SPECIFIED:

Panduit Tool Numbers: CT-1002, CT-1003 and CT-1004 are used to install single and dual wire Panduit insulated and non-insulated loose piece ferrules.

Crimps the following types:

- FTD type: 2 x 22 – 2 x 10 AWG [0.5mm² – 6.0mm²] insulated ferrules
- FSD type: 26 [0.14mm²] – 6 AWG [16.0mm²] insulated ferrules
- F type: 24 [0.25mm²] – 6 AWG [16.0mm²] non-insulated ferrules

TOOL FEATURES INCLUDE:

1. Self-adjusting crimp die for insulated and non-insulated ferrules. Ferrule size dependent on wire gage. Refer to ferrule packaging for proper ferrule and wire combinations.
2. Controlled cycle mechanism prevents tool from opening before crimp cycle is complete.
3. Manual release lever, push forward in the event that controlled cycle mechanism must be released.
4. Resilient grips to prevent operator fatigue.



NOTE: The grips are NOT intended to insulate against electrical shock.

TOOL WEIGHT: 10.6 oz. (300 gr.)

DIMENSIONS SHOWN IN PARENTHESES ARE MILLIMETERS AND ARE FOR REFERENCE ONLY.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	CT-1002, CT-1003 and CT-1004						
							CUSTOMER DRAWING						
							ITEM REVISION NAME:			PANDUIT			
							TP26498B01_01			MATERIAL:			
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:						
							(.x) ±		---		(.xxx) ± .015		
							(.xx) ±		.03		ANGLES ± 1°		
							THIRD ANGLE PROJECTION			DRAWING NUMBER: TP26498B01			
01		5-06-15		BLR		[Signature]		[Signature]		REMOVE CT-1005 & CT-1006		4857	
00		2-27-15		BLR		BJPU		ABJ		RELEASED		4857	
DRAWN BY:		DATE:		CHK		SCALE		SHT 1 OF 1		SIZE			
BLR		2-27-15		BJPU		NONE				B			